

mUF-4" Module


purification by ultrafiltration



Technical specification

	mUF-4"/1.5	mUF-4"/5
Maximum pressure	600 kPa	
Maximum trans membrane pressure	200 kPa	
Normal operating pressure	200 kPa	
pH range	2 - 10	
Maximum allowable free chlorine	long term 50 mg/L short term 300 mg/L	
Operating mode	dead-end / cross-flow	
Operating temperature	< 40 °C	
Membrane performance	50 kDa MWCO / 0.01 µm pore size	
Membrane material	hydrophilic double skin hollow fiber 1.0x0.4mm PAN	
Membrane area	1.5 m2	5 m2
Flow @ 100 kPa TMP / 25 °C		
- clean water	>5 L/min	>16.7 L/min
- piped water	>1.6 L/min	>5.4 L/min

Particle removal Bacterial / Viral barrier Point of Entry/Use

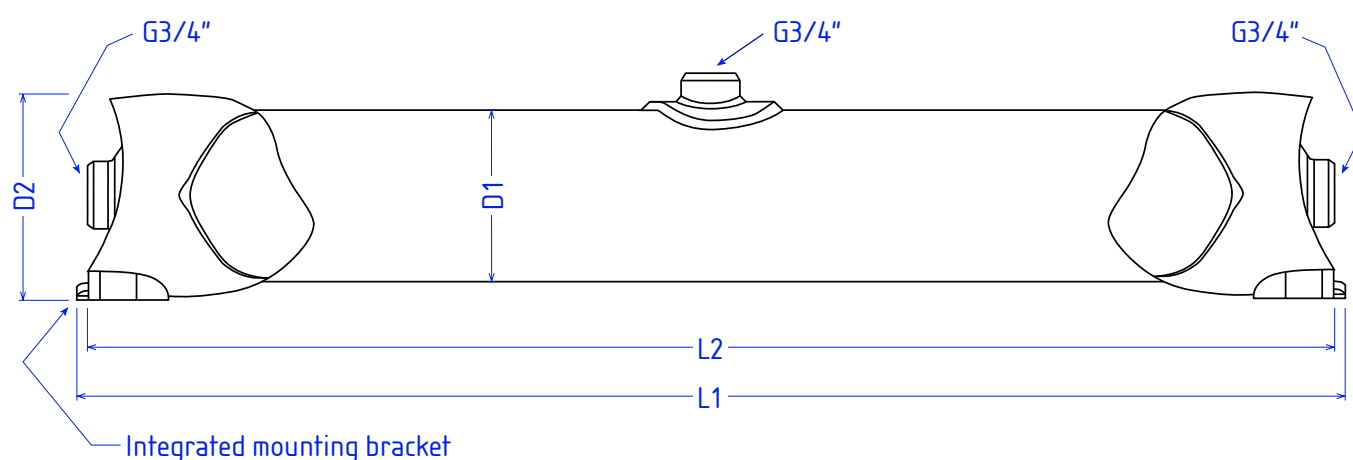

	D1 [mm]	D2 [mm]	L1 [mm]	L2 [mm]	G [kg]
mUF-4"/1.5	90	108	450	470	2.2
mUF-4"/5	110	132	812	799	3.7

Your reseller:



HITMA Filtratie

Anton Philipsweg 1
1422 AL Uithoorn
Postbus 175
1420 AD Uithoorn
Nederland
tel: +31(0)297-514 715
fax: +31(0)297-514 694
filtratie@hitma.nl
www.hitma-filtratie.nl